

## No Battery Running Man



### Electrical

- . 120/347VAC Dual voltage operation.
- . Test switch and charge LED indicator.

### Housing


- . Injection-molded thermoplastic ABS housing.
- . Plastic enclosure with 5VA flame retardant.
- . Single and double face universal.
- . Easy replacement pictogram design.

### Limited Warranty:

This device complies with part 15 of FCC rules. Operation is subject to following 2 conditions:  
 1 - This device may not cause harmful interference.  
 2 - This device must accept any interference received, including interference that may cause undesired operation.

### Illumination

Running man: 1.1W (Emergency Mood)

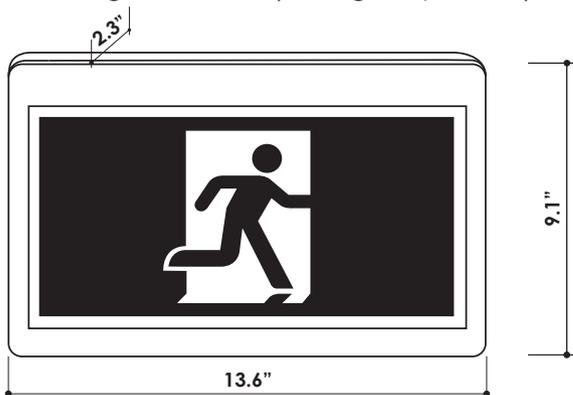

### Mounting

- . Suitable for wall mounting, ceiling mounting and side mounting.
- . Housing snaps to canopy with simple twist and locking tightly Secure housing to canopy.

### Warranty/Listing

- . Five years warranty for electrical parts and housing.
- . Suitable for use in 50°F (10°C) - 104°F (40°C) ambient temperature.
- . CSA listed meets all requirement in C22.2 No.141-10, Suitable for Canada market.

<b>INPUT VOLTAGE(VAC)</b>	120/277/347
<b>AC INPUT RATING</b>	120V=0.358A/2.7W
	277V=0.275A/2.0W
	347V=0.348/3.0W
<b>LIGHTING SOURCE</b>	LED
<b>DC POWER/VOLTAGE(NUCLEUS)</b>	3.6VDC=0.2W

<b>DC INPUT RATING</b>	3.15DC=0.2W
	3.6DC=0.22W
	4.2DC=0.02W
<b>SELF POWERED UNIT INPUT RATING</b>	120V=0.358A/2.7W
	277V=0.275A/2.0W
	347V=0.348/3.0W
<b>ENERGY TRANSFER</b>	TRANSFORMER DRIVEN

