

Specifications

Features:


- . Steel housing and thermal plastic remote heads
- . High efficiency LED
- . Universal wall mount
- . Dimension: 11.8" X 7.08" X 2.76"
- . 5 Years Warranty for the electronic parts and housing , 3 Years Warranty for battery

Electrical Specifications


- . 120/277/347VAC input(UL)
- . 2 x 2W LED heads
- . Diagnostic/pilot LED for AC ON and Charge
- . Push button test switch
- . Charging time: 24 hours
- . Emergency time: 4W--9 hours
- . Remote capable: 36W--30 minutes
- . 6V 7000mA Lead Acid battery
- . Operating temperature: 41° F (5°C) to 86° F (30°C)



Visible distance



Data, Photometric Data

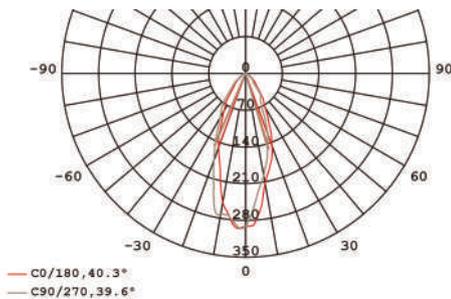

Dimensions:

